


PRODUCT SPECIFICATION SHEET

LOFT VENT TRAY



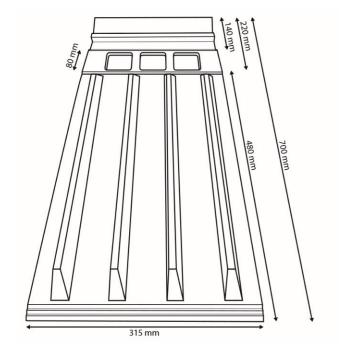

REF: AIR444RF

General

The loft vent tray is simple to install from inside the loft, self-adjusting to the pitch of the roof, no need to disturb the roof covering, lightweight and durable. Suitable for new build or refurbishment.

To install, just flex the tray at the crease and position it into the eaves between the rafters from inside the loft, making sure the ridges face the towards the underlay. You need to push the insulation up to the tray to hold it in place and check that the insulation material does not touch the roofing underlay. If you need wider spacing the trays can be clipped together to provide 10mm airflow

Details			
REF	AIR444RF	MANUFACTURING PROCESS	Injection moulded
BOX SIZE (MM)	360 x 145 x 705	MATERIAL	R-PET
PALLET SIZE (M)	1 X 1.2 X 2		R-FEI
FREE AREA	10,000mm ² per metre run when installed between rafters at eaves level	ASSOCIATED PRODUCTS	AIR435RF, AIR500
PACKING	Product per box = 50, Boxes per pallet = 50		AIR455RF, AIR500
WEIGHT	Product =86g, Box =4.8kg, pallet =255kg	COLOUR	BLACK

References BRE: DIGEST 262/270 BSI: BS5250 DOE: Building Regs F2 NHBC: Good Practice Guide NHBC: Standards 7.2

Version 1.0 14/03/2018 DRN BY T.S.HUISH DRG No. 004

Airflow(Nicoll Ventilators) Limited, Unit 15 Queensway, Stem Lane Industrial Estate, New Milton, Hampshire, BH25 5NN Telephone: 01425 611547 FAX:01425 638912 e-mail:sales@airflow-vent.co.uk

Made in the UK

Due to continuous development Airflow (Nicoll Ventilators) Limited reserves the right to amend the specification without notice.